

MAKO 2

The highest value Violet CTP solution for commercial press formats up to 560mm x 670mm (22.0" x 26.4")

The MAKO 2 CTP provides an easy, value-packed entry into CTP production with a full resolution range of 1200 – 3556 dpi. It is one of the fastest 2-page CTP units in its class, imaging over 27 GTO plates per hour at 2400 dpi. By combining simplicity, versatility and proven imaging technology, the MAKO 2 brings maximum CTP benefits including reduced operating costs and improved quality on press to 2-page printers.

- ECRM's versatile platesetter technology provides ultimate format flexibility - accommodates all 2-up presses and some 4-up presses.
- Future-proof design allows a smooth transition to violet chemistry-free plate technology.
- Flexible – ECRM's patented press registration pin bars allow for both edge and notch registration, matching a wider range of press requirements.


- Fastest plate loading of any CTP device. Simply register a plate and lower the pinch lever bar.
- No hidden extras – our online conveyor is standard on all MAKO CTP, allowing for a direct connection to the processor at no extra cost.
- ECRM's easy to use CtServer is included with the MAKO 2 and is custom-made to fit your needs. Our open-ended software system accepts 1-bit TIFF files – choose the solutions you want. ECRM is here to help.
- ECRM's patented plate handling and optical system provide long life and low replacement cost.
- Simple and intuitive operator interface makes training easy.
- Basic electricity requirements and quick installation—no dedicated power line needed. Low energy consumption, draws the same energy as a PC.



Choose ECRM for your Violet CTP solutions



ECRM products offer the lowest total cost of ownership in the business and the highest quality performance in the industry. Our manufacturing facility is located in Tewksbury, Massachusetts, USA and is certified as being in conformity to ISO 9001:2000 standards. Our signature flexible design lets you decide what's best for your CTP system, workflow, plates and processors. We support you every step of the way and work with you to ensure complete system integrity.

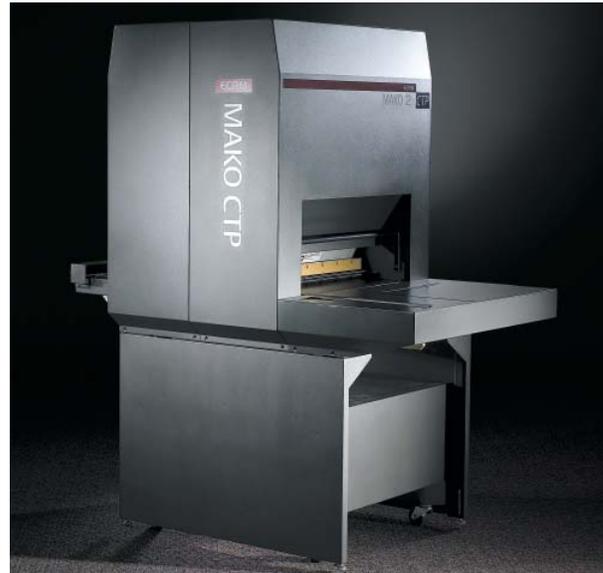

It's your business. We take it personally.

MAKO 2 Specifications

Plate Sizes	Maximum: 560mm x 670mm (22.0" x 26.4") Minimum: 228mm x 252mm (8.9" x 9.9")
Plate Thickness	0.14mm to 0.35mm (0.0055" to 0.014")
Media Types	Violet-sensitive photopolymer and silver halide metal plates. See media specifications for safe-light information.
Recording Source	Violet laser diode (405 nm), available for photopolymer or silver halide plates
Resolutions	Seven resolutions from 1200 to 3556 dpi (472 to 1400 dpcm) Resolutions include: 1200, 1270, 1800, 2400, 2540, 3048, and 3556dpi
Maximum Line Screen	Up to 200 lpi (78.7 lpcm). Media dependent
Repeatability	0.025mm (0.001") typical May vary according to media type and processing conditions
Processing	Plates are moved to processor automatically by a transport bridge - standard equipment on MAKO 2.
Environmental	Power: 100 - 240 Volts; 3 Amps; 250 watts maximum; 50/60Hz, single phase Heat Dissipation: 850 BTU/hour
Operating Conditions	62 - 86° F (17 - 30° C); relative humidity 45 - 65%, non-condensing. Relative humidity outside of this range may affect performance. Operating conditions outside plate media specifications may affect performance.
Weight	145.5 kg (320 lbs.)
Footprint Dimensions	Width: 96.5cm (38.0") Length: 160.0cm (63.0") Height: 188.0cm (74.0")

ECRM[®]
imaging systems

www.ecrm.com

Headquarters:

554 Clark Road
Tewksbury, MA 01876
USA
Tel: (+1) 978.851.0207
Fax: (+1) 978.851.7016
sales@ecrm.com

International Sales Offices:

3 Century Court, Tolpits Lane
Watford, Hertfordshire
WD18 9PU, UK
Tel: (+44) 1923.218.255
Fax: (+44) 1923.218.256
sales_uk@ecrm.com

B2, 10/F, Block B,
Kailey Industrial Centre,
12 Fung Yip Street,
Chai Wan, Hong Kong
Tel: (+852) 2564-8989
Fax: (+852) 2564-8821
sales_hk@ecrm.com
sales_asia@ecrm.com

All ECRM products carry the CE mark. All products are CSA & CSA/NRTL Certified. Class 1 Laser Products ECRM's Tewksbury facility is ISO 9001:2000 certified.

All trademarks are the property of their respective owners and their use in this documentation is acknowledged and recognized. The information provided in this document is subject to change without notice.